

PACKAGE AIR COOLED BLOW FILM

PRODUCTION BENEFITS:

- Greatly upgrades shiness ang transparency of plastic bags.
- Specially designed high air flow and low humidity.
- Upgrades machine speed and productivity . Increases firm production.
- Minimizes defeat ratio of production.
- Maximum stability temperature control.



BLOW FILM MACHINE

**Controlled by PLC
(Programmable Logic Controller)**




SAHAKIJ-ANAN INTERNATIONAL CO.,LTD.

434 Sukhumvit 77 Rd., (Soi On-nut 17 Yek 16), Suanluang, Bangkok 10250, Thailand
Tel : +66(0) 2717 9244-6 Fax : +66(0) 2717 9248
WEB SITE <http://www.sahakijanan.com> E-mail : service@sahakijanan.com
<http://www.vichchiller.com>



PRODUCTION BENEFITS:

- Greatly upgrades shines and transparency of plastic bags.
- Specially designed high air flow and low humidity.
- Upgrades machine speed and productivity . Increases firm production.
- Minimizes defeat ratio of production.
- Maximum stability temperature control.

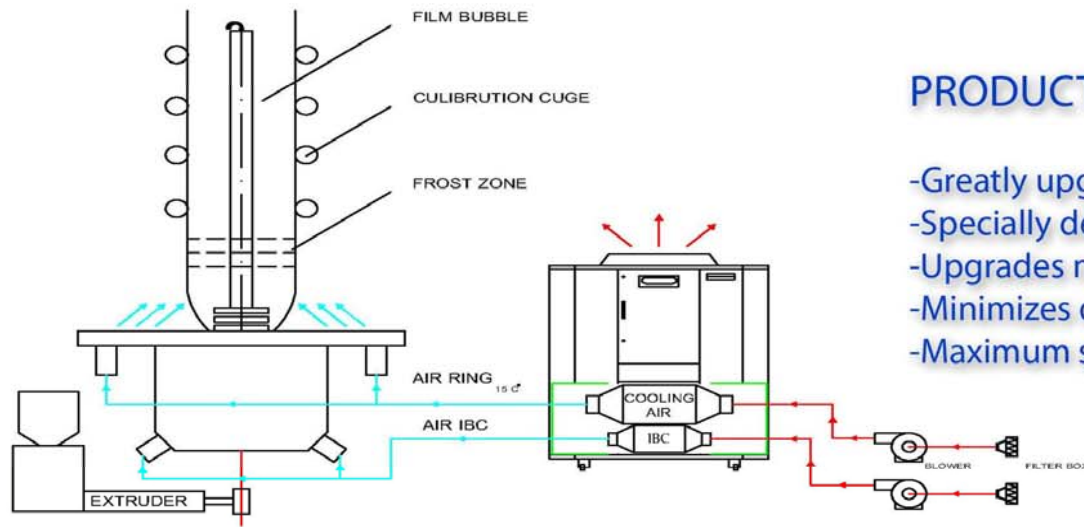

SPECIFICATION:

MODEL		SK/ACBF-6	SK/ACBF-8	SK/ACBF-12	SK/ACBF-15	SK/ACBF-20	SK/ACBF-25
Air flow	m ³ /min (m3/hr)	38(2280)	48(2880)	58(3480)	68(4080)	78(4680)	88(5280)
Air outlet port	INCH	6	6	8	8	10	10
Air cooling temperature	C	8C - 18C					
Power supply	V/PH/Hz	380 / 3 / 50					
Rate power	Amp	12	17.3	27.2	29.4	39.2	54.4
Controller		CONTROLLED BY PLC (PROGRAMMABLE LOGIC CONTROLLER)					
Refrigerating capacity	Btu/H	72000	96000	144000	180000	240000	300000
Compressor motor	HP	7-1/2	10	15	20	12-1/2 x 2	15 x 2
Fan horsepower	HP	1	1	2	2	2	2
Fan diameter	INCH	28"	28"	30"	30"	30"	30"
Refrigerant	R	R-22 / R-407c					
Machine dimensions	W x H x D	1300 x 1970 x 1140		1300 x 2200 x 1140		2400 x 2200 x 1140	
Machine weight	KG	435	440	475	485	922	1060

NOTE:- Nominal cooling capacity condition : chilled air out 8c. Ambient temperature 35c

**Specifications subject to change without notice

<http://www.sahakijanan.com>

<http://www.vichchiller.com>